




CAT40 End Mill Adapters

Features

- 3 µm - 0.0001" Bore Runout
- H5 Bore Tolerance or better
- Tapers are ground better than AT3 for optimal T.I.R.
- Coolant Thru
- Pre-Balanced for use @ 20,000 RPM

Optional (Order Separately):

- Jet-Blast (add "J" to the part number)
- DIN-B Coolant (Select models)

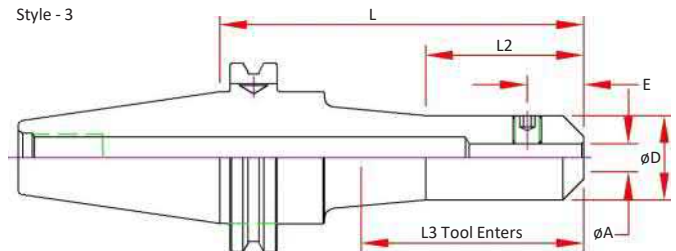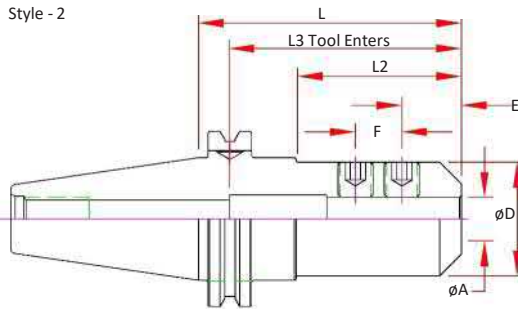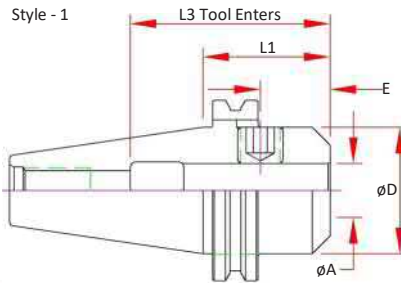

	Dual Contact Spindle Part Number	Standard Spindle Part Number	A Bore	D	E	F	L Projection	L2	L3 Max. Tool Enters	Screw Number	Style
5/8	CAT40-EM062-0175-B	CAT40-EM062-0175	0.6250	1.75	0.94	-	1.75	0.95	3.25	7	1
	CAT40-EM062-0250-B	CAT40-EM062-0250		1.50			2.50	1.70	3.62		2
	CAT40-EM062-0300-B	CAT40-EM062-0300		1.50			3.00	1.50	3.50		2
	CAT40-EM062-0400-B	CAT40-EM062-0400		1.50			4.00	2.50	3.50		2
	CAT40-EM062-0500-B	CAT40-EM062-0500		1.50			5.00	3.50	3.50		2
	CAT40-EM062-0600-B	CAT40-EM062-0600		1.50			6.00	4.50	3.50		2
3/4	CAT40-EM075-0175-B	CAT40-EM075-0175	0.7500	1.75	1.00	-	1.75	0.95	3.23	8	1
	CAT40-EM075-0250-B	CAT40-EM075-0250					2.50	1.70	3.94		2
	CAT40-EM075-0300-B	CAT40-EM075-0300					3.00	2.20	3.94		2
	CAT40-EM075-0350-B	CAT40-EM075-0350					3.50	2.70	3.94		2
	CAT40-EM075-0400-B	CAT40-EM075-0400					4.00	3.20	3.94		2
	CAT40-EM075-0500-B	CAT40-EM075-0500					5.00	4.20	3.94		2
7/8	CAT40-EM075-0600-B	CAT40-EM075-0600	0.8750	1.75	1.00	-	6.00	5.20	3.94	8	2
	CAT40-EM075-0900-B	CAT40-EM075-0900					9.00	8.20	3.94		2
	CAT40-EM087-0175-B	CAT40-EM087-0175		1.75			1.75	0.95	2.38		1
	CAT40-EM087-0350-B	CAT40-EM087-0350		1.75			0.81	3.50	4.25		2
	CAT40-EM100-0175-B	CAT40-EM100-0175		1.75			-	1.75	0.95		9
	CAT40-EM100-0300-B	CAT40-EM100-0300		2.00			1.00	3.00	2.24		9 & 10
1	CAT40-EM100-0400-B	CAT40-EM100-0400	1.0000	2.00	1.12	1.00	4.00	3.24	4.50	(2) 10	2
	CAT40-EM100-0600-B	CAT40-EM100-0600		2.00			6.00	5.24	4.50		(2) 10
	CAT40-EM125-0200-B**	CAT40-EM125-0200**		2.25**			2.00	1.20	2.38		9
	CAT40-EM125-0400-B	CAT40-EM125-0400		2.50			4.00	3.24	3.54		(2) 11
1 1/4	CAT40-EM125-0425-B	CAT40-EM125-0425	1.2500	2.50	1.12	1.00	4.25	3.49	3.54	(2) 11	2
	CAT40-EM125-0600-B	CAT40-EM125-0600		2.50			6.00	5.24	3.54		(2) 11
	CAT40-EM150-0400-B	CAT40-EM150-0400	1.5000	2.62	1.12	1.00	4.00	3.24	2.52	(2) 11	2

** No DIN AD+B Option Available - No ANSI Safety Area due to bore size - Will not tool change in Heavy Duty or Umbrella style tool changers & Alarm

CAT 40

CAT50

BT30

BT40

HSK 40E

HSK 63A

HSK 100A

STRAIGHT
SHANKS

COLLETS

PARTS &
ACCESS.

SHRINK
MACHINES

INDEXERS

