


CAT50 Mill Chucks

Features

- 5 μm - 0.0002" Runout @ 4 x Cutter Shank Dia.
- Designed for Tool Shanks w/ ISO h6 Class Tolerance
- Tapers are ground better than AT3 for optimal T.I.R.
- Pre-Balanced for use @ 15,000 RPM

Optional (Order Separately):

- Wrench
- Nylon Screw Seal for short tool shanks
- DIN-B Flange Coolant
- Fine Trim Balance
(Sample cutter required for balance compensation)

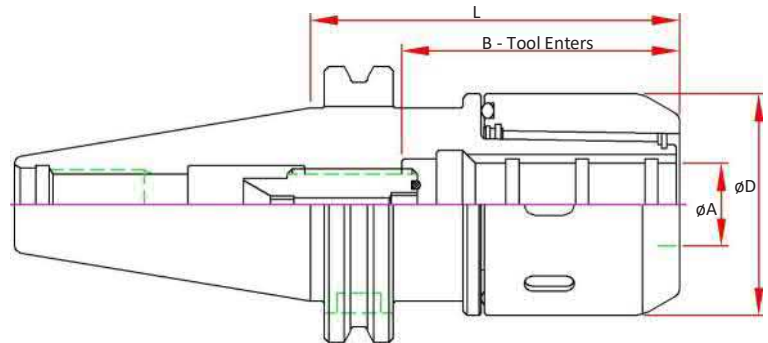

Part Number	A Bore	B Max. Tool Enters	D	L Projection	Preset Screw	Collet	Wrench
CAT50-MC075-0354	0.7500	2.76	2.09	3.54	ASC-16-40	MC075	50-55 HOOK
CAT50-MC075-0413				4.13			
CAT50-MC075-0531				5.31			
CAT50-MC075-0650				6.50			
CAT50-MC100-0315	1.0000	2.95	2.44	3.15	ASC-16-40	MC100	58-65 HOOK
CAT50-MC100-0354				3.54			
CAT50-MC100-0413				4.13			
CAT50-MC100-0531				5.31			
CAT50-MC100-0650				6.50			
CAT50-MC125-0354	1.2500	3.23	2.76	3.54	ASC-16-40	MC125	65-70 HOOK
CAT50-MC125-0413				4.13			
CAT50-MC125-0531				5.31			
CAT50-MC125-0650				6.50			

CAT40

CAT 50

BT30

BT40

HSK 40E

HSK 63A

HSK 100A

STRAIGHT SHANKS

COLLETS

PARTS & ACCESS.

SHRINK MACHINES

INDEXERS

